

SPECIFICATIONS:


CONTACT RATING: 50mA 12VDC.
 CONTACT RESISTANCE: 30m-ohms max.
 TRAVEL: 0.30±0.10mm.
 LIFE: 80,000 cycles min.
 OPERATING FORCE: 250±30gf.

MATERIALS:


BASE & STEM: Nylon 66.
 COVER: Brass.
 TERMINAL: Brass.
 CONTACT: Silver copper.
 O-RING: Silicon.

Specifications and Dimensions subject to change



KRSAM-0712



P.C.MOUNTING

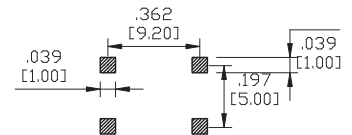

L	DIM. "A"
1	.197 [5.00]
2	.276 [7.00]
3	.335 [8.50]

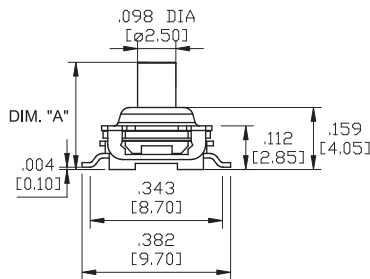

HOW TO ORDER

