



NEW!

SPECIFICATIONS:

RATING: 6A @ 125VAC or 28VDC
3A @ 250VAC


ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.
CONTACT RESISTANCE: 10m-ohms max. initial
INSULATION RESISTANCE: 1,000M-ohms min.
DIELECTRIC STRENGTH: 1,500VAC for 1 minute.
OPERATING TEMPERATURE: -30°C to +85°C.
IP67 FRONT PANEL SEALING.

MATERIALS:

CASE: Diallyl phthalate(DAP)(UL 94V-0).
HOUSING: Stainless Steel.
KNOB: Aluminum, anodized.
MOVABLE CONTACT/ TERMINALS: Copper alloy, silver plated.
ACTUATOR/ NUT: Brass, nickel plated.
TERMINAL SEAL: Epoxy.

If your preferred product configuration is not shown, please contact our sales representative for custom design.



HOW TO ORDER SYSTEM

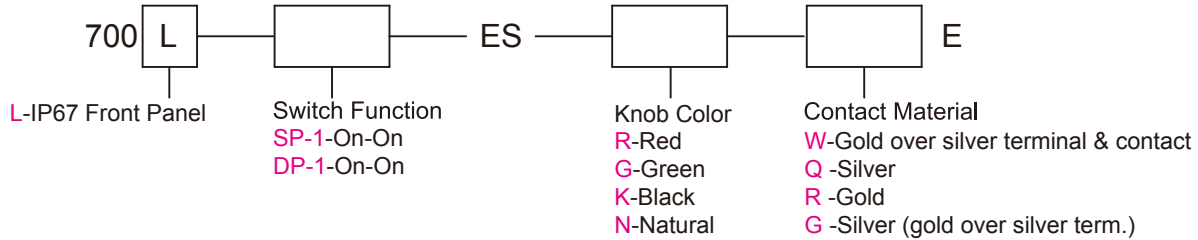

SPDT



Model No.	Switching Position		
SP-1	ON	NONE	ON
Term. Comm.	2-3	OPEN	2-1

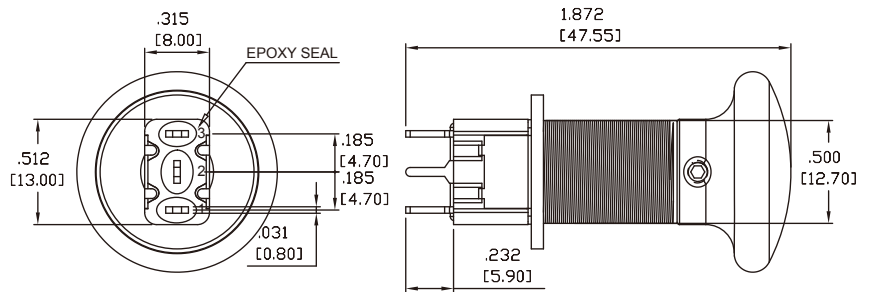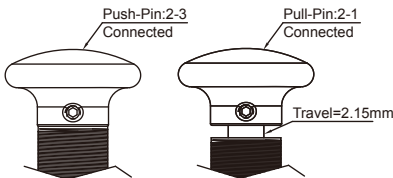

DPDT



Model No.	Switching Position		
DP-1	ON	NONE	ON
Term. Comm.	2-3,5-6	OPEN	2-1,5-4

